


GENERAL NOTES:
 ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN INCHES.
 BATTERY DECALS SHOULD BE LOCATED AWAY FROM AREA OF MAGNET CONTACT.

SYSTEM SPECIFICATIONS:
 TO ENSURE PROPER SYSTEM OPERATION
 CONCRETE LOAD CAPACITY - 3000 PSI
 FLOOR SURFACE AT DRIVE WHEEL MUST BE CLEAN AND DRY.
 CHARGER SHELF - 48" DEEP
 DOUBLE STACKING OF CHARGERS ACCEPTABLE.
 QUANTITIES AND DIMENSIONS MAY AFFECT CHARGER TO BATTERY RELATIONSHIP.
 ALTERNATE BATTERY STORAGE CONFIGURATIONS AVAILABLE UPON REQUEST.
 VEHICLE GUIDE PATH MUST BE LEVEL + OR - 1/4" IN 10 FEET.

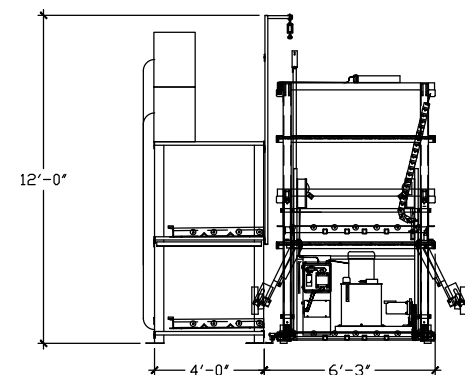

EQUIPMENT DESCRIPTION										
DST2-44-6-54-MAG-AC										
BATTERY DESCRIPTION										
TYPE	TRUCK MAKE & MODELS	QTY. TRUCKS	TOTAL BATTs.	QTY. STORED	FUTURE STORED	ROLLER HEIGHT	BATTERY WEIGHT	BATTERY LENGTH	BATTERY WIDTH	BATTERY HEIGHT
A	Swing Reach	6	12	6	X	X	X	44.00	23.56	30.00
B	Stand Up Truck	13	26	13	X	X	X	38.25	17.82	30.50
C	Sit Down	4	8	4	X	X	X	38.25	24.56	22.62
D	X	X	X	X	X	X	X	X	X	X
TOTAL		23	46	23	X					

DRAWING MUST BE APPROVED PRIOR TO FABRICATION OF THE SYSTEM.

SIGNED BY: _____

DATE: _____

DST DOUBLE LEVEL SYSTEM SINGLE SIDED	
SCALE: None	DATE:
DRAWN BY: T.Jones	REVISED:
DISTRIBUTED BY:	DRAWING NO.