




## The Multi-Shifter MSTAC1-53 Uni-Shifter



**MSTAC1-53 AC Powered Unit**  
*(Shown with Special Bridge Assembly)*

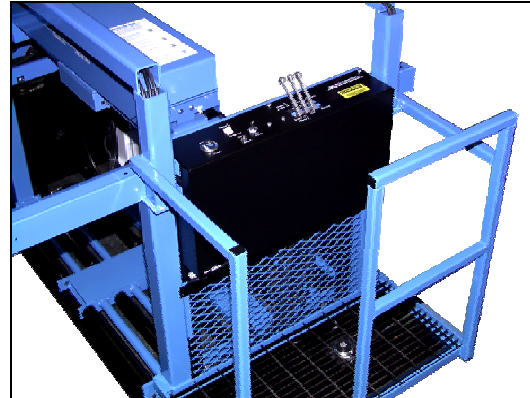

**Enclosed Operators Platform with Easy to Operate Vehicle Controls**

### Dimensional Specifications

(Specifications Subject to Change without Notice)

Overall Width:	63.00"
Overall Length:	100.50"
Battery Compartment Width:	(1) 53.00" or (2) @ 25.00"
Lowered Roller Bed Height:	6.00"
Elevated Roller Bed Height:	26.75"
Vehicle Weight:	2500 Lbs. or 1136 Kgs.

### Performance Specifications

(Specifications Subject to Change without Notice)

Capacity:	8000 Lbs. or 3628 Kgs.
Travel Speed:	127 ft. / Minute
Lift Cycle Time:	10.50 ft. / Minute
Bridge Traverse Speed:	6 Seconds
Hydraulic System Pressure:	1900 PSI <i>(Sub-System Pressures Vary)</i>
Input / Operating Voltage:	3 HP 230 / 460 VAC 3P 3 HP 575 VAC 3P <i>(Options Available, Consult Factory)</i>
Control Circuit Voltage:	24 Volt DC <i>(Safer for Operator)</i>

