


GENERAL NOTES:
 ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN INCHES.
 BATTERY DECALS SHOULD BE LOCATED AWAY FROM AREA OF MAGNET CONTACT.

SYSTEM SPECIFICATIONS:
 TO ENSURE PROPER SYSTEM OPERATION
 CONCRETE LOAD CAPACITY - 3000 PSI
 FLOOR SURFACE AT DRIVE WHEEL MUST BE CLEAN AND DRY.
 CHARGER SHELF - 48" DEEP
 DOUBLE STACKING OF CHARGERS ACCEPTABLE.
 QUANTITIES AND DIMENSIONS MAY AFFECT CHARGER TO BATTERY RELATIONSHIP.
 ALTERNATE BATTERY STORAGE CONFIGURATIONS AVAILABLE UPON REQUEST.
 VEHICLE GUIDE PATH MUST BE LEVEL + OR - 1/4" IN 10 FEET.

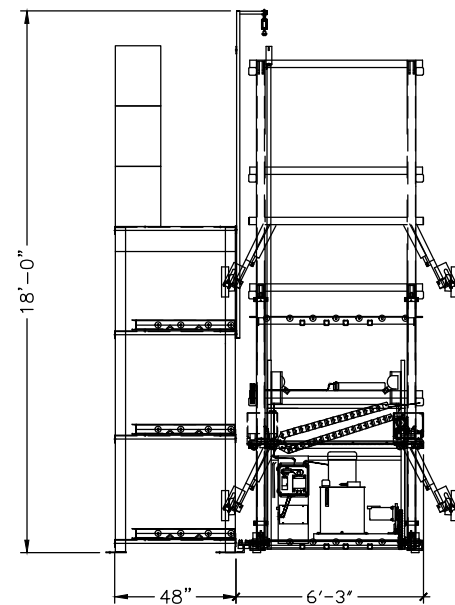

EQUIPMENT DESCRIPTION										
TST2-44-6-94-MAG-AC										
BATTERY DESCRIPTION										
TYPE	TRUCK MAKE & MODELS	QTY. TRUCKS	TOTAL BATT.	QTY. STORED	FUTURE STORED	ROLLER HEIGHT	BATTERY WEIGHT	BATTERY LENGTH	BATTERY WIDTH	BATTERY HEIGHT
A	18-155-17	32	64	32	0	X	2929	38.33	20.21	30.56
B	12-90-13	32	64	32	0	X	936	30.63	13.00	23.25
C	X	0	0	0	0	X	X	X	X	X
D	X	0	0	0	0	X	X	X	X	X
E	X	0	0	0	0	X	X	X	X	X
F	X	0	0	0	0	X	X	X	X	X
G	X	0	0	0	0	X	X	X	X	X
H	X	0	0	0	0	X	X	X	X	X
I	X	0	0	0	0	X	X	X	X	X
TOTAL		64	128	64	0					

DRAWING MUST BE APPROVED PRIOR TO FABRICATION OF THE SYSTEM.

SIGNED BY: _____

DATE: _____

MULTI-SHIFTER, INC.	
TST TRIPLE LEVEL SYSTEM SINGLE SIDED	
SCALE: None	DATE:
DRAWN BY:	REVISED:
DISTRIBUTED BY:	DRAWING NO.